

MODULIER® 10

MODULAR, ALUMINIUM ENTRANCE MATTING SYSTEM


INSTALLATION GUIDE

During the installation of entrance matting systems, strictly comply with all relevant occupational safety regulations!


Wear protective gloves during all work processes, when drilling, screwing or cutting to size, safety goggles are mandatory!



1. Before starting the installation, verify that the correct types and quantities of elements have been delivered.

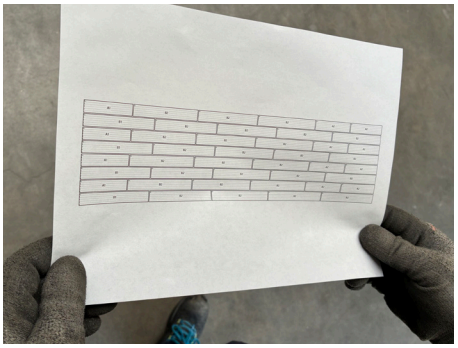

2. Review the installation drawing and identify the starting and ending modules according to the laying sequence.

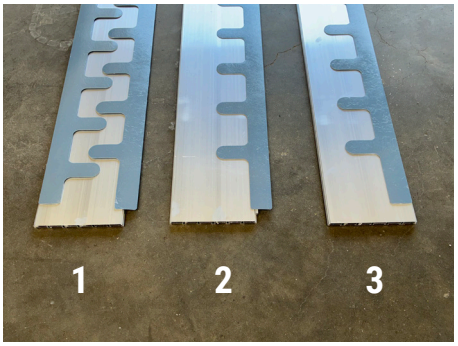

3. Based on the back plates, the modules can be easily identified: 1. starting modules, 2. intermediate modules, 3. ending modules.




4. Ensure that the frame and recess are of the correct size and that the subfloor is clean, dust-free and perfectly smooth.




5. Before final placement, check that all modules fit perfectly into their designated positions.




6. If necessary, cut the elements to size on site to ensure seamless installation.

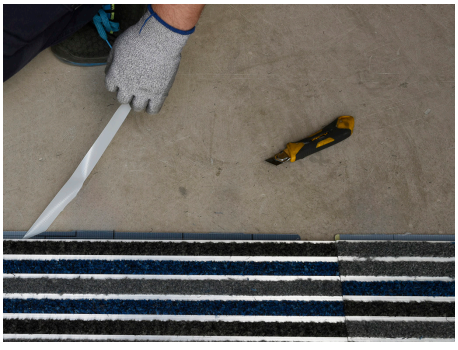

7. Begin installing the modules row by row, remove the protective film from the adhesive strip.

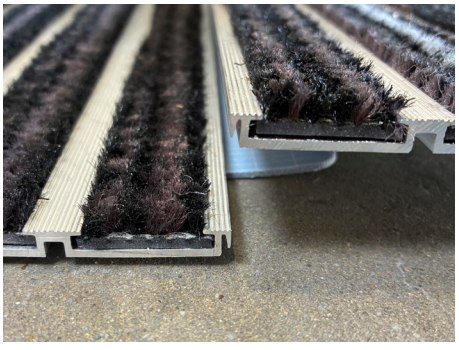

8. Fit the modules together seamlessly according to the installation plan.

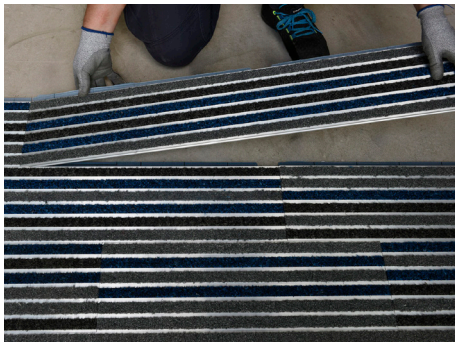

9. During installation, ensure that all module units align precisely with each other.